



#31  
BT  
02-25-02

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

ATTY.'S DOCKET: SMITH=11

In re Application of:

SMITH

Appln. No.: 09/888,572

Filed: June 26, 2001

For: MODULAR SOFTWARE...

) Art Unit: 2817

) Examiner:

) Washington, D.C.

) September 25, 2001

)

)

)

RECEIVED

FEB 07 2002

Technology Center 2600

RECEIVED  
SEP 28 2001  
JC 2800 MAIL ROOM

REQUEST FOR PRIORITY

Honorable Commissioner for Patents  
Washington, D.C. 20231

Sir:

In accordance with the provisions of 37 CFR §1.55 and the requirements of 35 U.S.C. §119, filed herewith a certified copy of:

Appln. No.: 0015943.4


Filed: June 30, 2000.

It is respectfully requested that applicant be granted the benefit of the priority date of the foreign application.

Respectfully submitted,

BROWDY AND NEIMARK, P.L.L.C.  
Attorneys for Applicant(s)

By

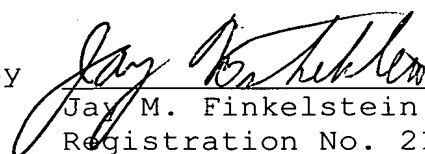  
Jay M. Finkelstein  
Registration No. 21,082

JMF:lt

Telephone No.: (202) 628-5197

Facsimile No.: (202) 737-3528

F:\H\Hsl\Smith11\PTO\prioritypto 25SEP.01.doc



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

## CERTIFIED COPY OF PRIORITY DOCUMENT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

5th July 2001

RECEIVED  
SEP 28 2001  
TC 2000 MAIL ROOM

BEST AVAILABLE COPY

# Patents Form 1/77


Patents Act 1977  
(Rule 16)

The Patent Office

30 JUN 00 0549028-1 CA9227  
P0177700 0500-0015943.4

## Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

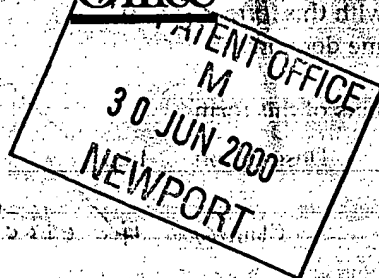

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

AKYA/MPAI.

2. Patent application number

(The Patent Office will fill in this part)

0015943.4

3. Full name, address and postcode of the or of each applicant (underline all surnames)

MR. GRAEME ROY SMITH. (AKYA LIMITED)  
58 CHURCH MEADOW,  
UNSWORTH,  
BURY,  
LANCS. BL9 8JF.

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

UK.

6252803002

4. Title of the invention

MODULAR SOFTWARE DEFINABLE PRE-AMPLIFIER.

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MR. GRAEME ROY SMITH.  
AKYA LIMITED.  
58 CHURCH MEADOW,  
UNSWORTH,  
BURY,  
LANCS.  
BL9 8JF.

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

NO.

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or

# Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form

Description

14

Claim(s)

4. ETC CLAIMS.

Abstract

1

Drawing(s)

777

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

ONE

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I request the grant of a patent on the basis of this application.

Signature Graeme Smith

Date 29 June 2000

12. Name and daytime telephone number of person to contact in the United Kingdom

MR. GRAEME SMITH.

0161 766 1216.  
0161 766 3555.

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.

## MODULAR SOFTWARE DEFINABLE PRE-AMPLIFIER

This invention relates to a modular software definable pre-amplifier.

Pre-amplifiers are fixed units that implement signal conditioning for several input formats. The type and level of signal conditioning is limited and tends to be performed in the analogue domain. This tends to introduce unwanted affects in terms of noise and signal distortion. Manipulating signals in the digital domain provides improved performance. For example, digital filters have the following advantages over their analogue counterparts;

- they do not drift,
- linear phase characteristics are possible,
- they can handle low frequency signals,
- the frequency response characteristics can be made to approximate closely to the ideal,
- the accuracy of the filter may be controlled by selecting the appropriate word length.

Many of today's music formats are produced and stored in the digital domain. There is also an increasing array of media types and device to play them; compact disc players, Digital Versatile Disc (DVD), MP3 players, Mini-Disc player, Digital Audio Tape (DAT). There are currently several data formats MPEG 2, MP3 and new formats are being introduced or planned, such as MPEG 4 audio. This makes it difficult for consumers to keep up to date with new technology. New standards are constantly being developed e.g. MPEG4 and MP3, which means equipment, can quickly become obsolete requiring the consumer to purchase new units if a new media type is adopted. Also the interfaces between units can change so interconnection between legacy equipment means that the units are incompatible. With the introduction of new media formats new systems require interface upgrades, which requires changing more than the interfaces, usually a whole system element needs to be replaced and new hardware and software installed. In fact, interfacing between system elements can be one of the most complex problems to overcome as many new interfaces rely on software protocols to implement their functionality. For example Universal Serial Bus (USB), Firewire (1394 standard) and UTOPIA Level 2 interfaces.

Being able to swap between the different formats without having to substitute whole equipment units would be a great advantage and cheaper for the consumer.

Interconnection between the various equipment boxes requires many cables and tends to be unwieldy. It also means that a pre-amplifier unit is dedicated to the system to which it is attached. Other remote devices cannot access the facilities provided by the pre-amplifier apparatus.

According to the present invention there is a modular and software definable pre-amplifier apparatus (used to perform audio signal conditioning before being output to power amplification and or headset means) comprising:

- (a) one or a plurality of software definable logic blocks, these logic blocks being based on Programmable Logic Devices (PLDs), such as Field Programmable Gate Arrays (FPGAs), which can be configured in real time and or non real time to implement in hardware different signal processing functions required for different digital signal processing algorithms and or audio processing protocols, such as Dolby noise reduction, AC3, MPEG2, MP3, MPEG4, Home Theatre, various types of digital filters, thus allowing the apparatus to be used in different audio system configurations, the programmable logic optionally providing hardware acceleration of complex and software intensive functions, the configuration of the software definable logic blocks being performed by either firmware stored in local memory associated with the programmable logic devices and or by the host processor transferring the configuration data to the programmable logic devices directly or indirectly to local memory associated with the programmable logic devices or via a JTAG port of the programmable logic device, the choice of configuration firmware program depending on the user selected parameters, these parameters being entered into the apparatus via either an integrated keypad and front panel controls and or via remote control means, or personal computer means, the input information being displayed on display means, such as an Liquid Crystal Display (LCD), the software definable logic blocks optionally incorporating digital signal processor (DSP) devices and associated memory devices, the configuration and allocation of the software programs used by each digital signal processor device being performed in real time and or non real time by the host processor or configuration routines stored in non-volatile memory associated with the digital signal processors, the allocation of the specific software program being determined by user inputs;
- (b) mezzanine and or card modules which allows the apparatus to be expanded or upgraded for use with other protocols or for adding more audio output channels and or accommodating more source channel interfaces, is accomplished by interfacing mezzanine or card modules to the apparatus, these mezzanine and or card modules containing any combination of the following circuitry;
  - 1). Digital Signal Processor,
  - 2). Memory,

- 3). Programmable Logic Devices (PLDs),
  - 4). Interface logic,
  - 5). Analogue to Digital Converter (ADC),
  - 6). Digital to Analogue Converter (DAC),
  - 7). Small signal amplification and or filter circuitry;
- (c) integrated memory means, such as a hard disc drive and or non-volatile semiconductor memory and or volatile semiconductor memory for storing and retrieving digitised audio data signals;
- (d) a host processor and associated program memory means for controlling, monitoring and configuring the apparatus;
- (e) modem means, allowing Internet access so the user to download upgrade firmware or software for implementing new audio protocols and or configuring the programmable logic hardware and or signal processing algorithms allowing the logic and processing elements in the apparatus to be reconfigured to implement the new algorithms and or hardware configurations, the new firmware and software being stored in non-volatile memory, the Internet access also allows the user to download audio information, such as MP3 data, which can then be processed and optionally stored by the apparatus before being output to other apparatus, such as a power amplifier and or headset.

With such apparatus, manufacturers will be able to provide card modules for the different system functions. Users will then be able to "construct" a pre-amplifier apparatus and use existing card modules to build new configurations. As the card modules and or mezzanine cards incorporate programmable interfaces, a user will be able to easily add new functions and upgrades to the system by simply replacing, memory devices, mezzanine cards or individual card modules. As the backplane can transfer data of different format by encapsulation techniques, it will be easy to add new formats. The backplane is based on high-speed differential serial connections (up to 600 Mega-bits per second). This facility provides adequate means for future system performance. Of course, new, higher speed interface could easily be added to a card module to incorporate future high-speed inter-card module communications.

In another embodiment, certain system functions can be performed in software and or firmware. These types of functions include for example, digital filters, codecs, digital signal processing algorithms such as Fast Fourier Transforms (FFTs), Inverse Fast Fourier Transforms (IFFTs), noise reduction, surround sound algorithms, encryption and authentication.

To perform these functions the software is run on microprocessors, Digital Signal Processors (DSPs), Reduced Instruction Set Computers (RISCs). This concept allows different sub functions required to form parts of the overall desired entertainment system to be implemented in software and run on a microprocessor. To allow for maximum flexibility, several processors and associated memory and Input - Output peripheral devices can be provided on a single card module. As different entertainment systems require different sub-functions, the host controller can allocate the various software sub functions to various processors as necessary. For example, depending on the capabilities of the processor and the required functionality, a processor could run several software sub functions if the processing time permits and they are effectively sequential operations or the host controller could allocate different software sub functions to different processors and perform the required group of tasks in parallel.

This concept can be extend to include implementing system sub functions in programmable logic. The use of programmable logic, such as Field Programmable Gate Arrays (FPGAs), is sometime required to implement more complex and time consuming algorithms, which are better, suited to hardware implementation. This gives rise to the concept of "Software Definable Systems" or SDS. However, the use of programmable logic still requires the host controller to download firmware to program the programmable device to implement the desired sub function or sub functions required in the overall system configuration.

The fact that Software Definable Systems (SDS) provided the greatest flexibility (functional re-use and system re-configuration) in system design means that it is expandable and easily upgradeable. The processor card module can have mezzanine card slots to allow the addition of more processors when a system needs to be expanded. The use of Plug'n'Play facilities means that the host processor can automatically determine the number and capabilities of the processors and or programmable logic devices available and hence allocate the desired resources accordingly.

Such a system can download new software and or firmware functions or upgrade existing functions from the Internet via the modem module.

A specific embodiment of the invention will now be described by the way of example with reference to the accompanying drawings, in which: -

Figure 1 shows a logical block diagram of the pre-amplifier apparatus and how the sub blocks are interconnected;

Figure 2 shows a logical block diagram of input stage module;

Figure 3 shows a logical block diagram of the data storage section;



Figure 4 shows a logical block diagram of the signals processing stage;

Figure 5 shows a logical block diagram of the output stage of the pre-amplifier;

Figure 6 shows a logical block diagram of the host processor and controller section of the pre-amplifier;

Figure 7 illustrates an example of an overall system in which communications between the pre-amplifier and other devices is by wireless means.

In a preferred embodiment of the invention the pre amplifier apparatus uses one or more software and or firmware definable logic blocks to implement audio processing functions. These logic blocks can be based on any combination of DSP, programmable logic, such as FPGAs, memory to store programs, data and configuration parameters. The logic blocks and devices are configured by the host processor based on the selected audio processing algorithm or algorithms required for a particular input output combination. These algorithms include MPEG2 audio processing for layers 1, 2 and 3 (MP3), AC3, Dolby Noise Reduction, Surround sound systems, 3D sounds, Home Theatre and the like. Having programmable logic and processing arrays allows the host processor to configure the logic blocks and devices so certain audio processing functions can be efficiently allocated to the different blocks. In some cases, where processors and programmable logic devices operate at high frequencies, these logic blocks can implement several different algorithms by being re-configured in real time to perform multi-tasking. The control algorithms being stored in local memory at initialisation by the host processor. Examples of programmable logic to implement these functions include the FLEX and MAX series of devices from ALTERA. Configuration can also be stored locally in configuration EPROMs, such as the EPC1064. Having the program and re-configuration data stored locally is more efficient and doesn't become a processing burden on the host processor which would have to be a powerful processor operating at many MIPS to cater for all the interrupts and reconfiguring of the logic blocks during operation.

The pre-amplifier apparatus 2 is made up from several sub-blocks. Figure 1 outlines the interconnection of the various sub-blocks, which make up the pre-amplifier apparatus 2. These are the input stage module 2I, the digital signal processing stage 2S, the data storage section 2M, the User selection controls and display 2U, the host processor and controller section module 2H and the output stage module 2O.

A block diagram of the Input Stage module 2I is shown in figure 2. The input stage sub-block or module 2I contains the circuitry to interface peripheral devices to the pre-amplifier 2. These devices include, but are not limited to, a remote control unit 1R, a compact disc player 1C, a Digital Audio Tape (DAT)

player 1D, an MP3 player 1N, a modem 1M a tuner 1T and microphones 1F. Figure 7 shows a system example of how the pre-amplifier 2 uses wireless communication links to transfer data between itself and peripheral devices. However, the connection between the pre-amplifier 2 and the peripheral devices in the system do not have to be by wireless means and can be by cable means. Though several peripheral devices are shown in figure 7, this does not exclude other devices such as a tape cassette player or a signal from a record turntable unit.

Input signals from a peripheral device, such as a compact disc player 1C can be either an analogue format or a digital format. As all signal processing is performed in the digital domain any analogue signals have to be first converted into the digital domain using analogue to digital converters (ADCs) 3A. The analogue to digital converters (ADCs) 3A will have the data resolution, sampling rate and other characteristics to correctly translate the analogue signals to digital signals without introducing any noise or aliasing affects. Though different systems use different resolutions the ADCs 3A should have a minimum resolution of 16 bits and a maximum resolution of 24 bits. Devices include the Burr Brown PCM1700 or Crystal Semiconductor CS5394. Analogue signals are first buffered, amplified and filtered 3B. These signals are then passed to the analogue to digital converters 3A via an analogue multiplexer 3AM. Several analogue input buffer circuits 3B can be used, one for each analogue peripheral device. Signal source selection from the analogue input buffers 3B to the input of the analogue to digital converters 3A is controlled by the host processor 7H based on user inputs. The apparatus 2 could have several separate digital serial interfaces, which are applied to a multiplexer. The output of the multiplexer being determined by the selector input. This value is read by the host processor, which then writes a value to the multiplex register (not shown) to select the correct input. The multiplexer register being address mapped.

Digital signals are also buffered using a digital buffer 3C before being input to the digital interface 3S. Source selection to the digital interface 3S is via the digital multiplexer 3DM and is controlled by the host processor 7H based on user inputs. The digital interface 3S performs data formatting and decoding for various digital audio protocols for both transmit and receive data. An example of such a circuit is the CS8427 from Crystal Semiconductors.

The Input stage 2I can optionally have the facilities to allow a modem 3M to be connected to the apparatus 2. The modem 3M could be an Asymmetrical Digital Subscriber Line (ADSL) modem or cable modem or a low speed modem (say a V.90 compliant modem) for example and takes the form of a PCMCIA or PC card which can be inserted into a PC TYPE1 / 2 or 3 slot located on the apparatus 2. The software required to initiate, establish and control an Internet link is performed by the host processor and controller section 2H. Employing a module approach as in the described apparatus

allows upgrades to higher performance systems easily and cheaply and access to new media types.

Data received from the various signals sources is output onto the host bus 2HB after being processed by the relevant input circuitry. Commands to configure and select the input circuitry are transferred from the host processor and controller section 2H via the Control / Select bus 2CS. Alternatively, local decoding can be performed by decoding information presented on the control bus 2CS.

In a further embodiment communication between the pre-amplifier apparatus 2 and the peripheral devices is by wireless means. This alleviates the need for expensive and cumbersome connection cables between the various signal source devices or peripherals. Module 3WM is a wireless link module which is used to allow digital data from a peripheral device, such as a compact disc player 1C to be received by the pre-amplifier 2. These wireless links can be bi-directional allowing two-way communications between the pre-amplifier 2 and any of the peripheral devices. Such information could include control data to control the peripheral device via the pre-amplifier 2 using a "universal" remote control unit 1R, which would be used to select a new track for example. The wireless module 3WM can be integrated as part of the apparatus 2 or be a removable module, similar to a PC TYPE 1, 2 or 3 card or mezzanine card. These self-contained modules would be easily inserted and removed from the apparatus 2 making then very user friendly. The use of "Plug'n'Play" technology means that at start-up, the host processor 7H will perform a routine to search and establish what hardware is available in the apparatus 2 and configure the apparatus 2 accordingly.

The host processor and controller section 2H performs all the 'housekeeping' tasks including reading values input via the input selection controls and display circuitry 2U. The updated and selected values being displayed on display means 7D, such as an LCD display 7D. Figure 6 shows a block diagram of the host controller and controller section 2H together with the user selection controls and display module 2U. An Infra-red remote control interface 1R allows user commands to be received, demodulated, decoded and passed to the host processor 7H. These values being transferred to the corresponding logic block or blocks so they can be used by the audio processing algorithms. Communication between the pre-amplifier apparatus 2 and the remote control means 1R can be either an infra red protocol, such as IrDA or a wireless protocol such as Bluetooth. In the latter cases, a wireless remote interface 7W will be required. However, as wireless protocols such as Bluetooth and HomeRF allow multiplexing of several channels only one wireless module 7W is required for the basic system. Due to the modular nature of the apparatus 2 more wireless modules 7W or 3WM can be added if necessary to implement more complex multi-channel systems.

Any system configuration will require a control means to initialise, control and monitor system performance. This will be provided by the host processor and controller section 2H. Software driver routines to control the various card functions will be stored in non-volatile program memory means 7P, such as FLASH Memory. Figure 6 shows a logical block diagram of a Host Processor and controller section 2H, which incorporates the display 7D and the remote control functions 7R and 7W. Selecting the desired system configuration and modifying the variable parameters, such as volume and tuning, is either by front panel controls or via a Hand-Held Remote Control unit 1R. Instructions are transmitted to the pre-amplifier apparatus 2 using an infra red link. These signals are received and decoded by the IR remote control receiver and decoder 7R. Chosen parameters are consequently displayed on the LCD display 7D. Reception of signals or changes to front panel settings causes an interrupt to the Host Processor 7H. The host processor 7H services the interrupt and updates the corresponding system parameters by addressing the relevant function and writing the relevant data to the appropriate control registers. In the case of the display 7D and remote control circuitry 7R / 7W, data is passed to the host processor 7H via host bus means 2HB.

The various programs to implement the different algorithms and configure the logic blocks are stored in host program memory 7P. This has the advantage that the processor 7H can allocate the different sub programs to different logic blocks depending on the number and type used in the pre-amplifier apparatus 2. The host processor 7H will at start-up or initialisation "interrogate" the various logic blocks to discovery what type and how many logic blocks are available in the system so it can determine how to efficiently configure the system to perform the selected audio processing algorithms and or protocols. Also, certain card modules or mezzanine modules will incorporate Plug'n'Play means, which allows card modules to initialise and or assist in configuring themselves.

Local memory 7L is used by the host processor 7H for storing parameters and variable used in processing. The address decoder circuitry 7A is used to decode addresses placed on the host bus 2HB by the host processor 7H and generate chip select signals for the various logic blocks in the apparatus 2.

The address decode circuitry 7A is shown in figure 7 as a local block, but the address decoding could be performed elsewhere in the apparatus 2. For example, each section could employ its own address decoding (not shown). To allow a Personal Computer (PC) to be connected to the apparatus 2 a UART / RS232 interface 7U is provided (Maxim MAX202) for example. This could be used to control the apparatus 2, or perform diagnostic testing, or download new audio protocol algorithm to the host program memory 7P via the host processor 7H for example. Though an RS232 interface is shown in figure 7 other interfaces could be used, such as a Universal Serial Bus (USB) interface or a Firewire interface.

Though the apparatus 2 allows "music data" to be sourced in various formats from peripheral devices, such as a compact disc player 1C or a radio tuner 1T for example, the pre-amplifier apparatus 2 also has the facilities to store, retrieve and processes "music data" stored internally on a hard disc drive 4HD, non-volatile memory 4NV, volatile 4VM and removable memory cards 4RM. Figure 3 shows a block diagram of the data storage section 2M and how access to the various memory blocks is achieved. Access to the data storage section 2M is via two ports, namely the digital signal processing stage 2S and the host processor and controller section 2H. Therefore, the memory in the data storage section 2M is considered dual port and arbitration logic 4A is required to control access to the memory in the data storage section 2M. This will take a conventional form of having bus request and bus grant signals. Arbitration will however ensure no one block has more than its fair share of accesses to the memory by locking out the other processor.

This data will be compressed to reduce memory storage. The compression algorithms include MP3 and MPEG4 audio compression. This "music data" will be written to the hard disc drive 4HD under the control of the host processor 7H. The source of the "music data" can be from the peripheral device or more likely from the Internet via modem means 3M. For example, the user would open an Internet connection using the apparatus 2 and modem 3M. The selected MP3 data would be downloaded from the Internet and stored on the hard disc drive 4HD or non-volatile memory 4NV or volatile memory 4VM or removable memory card 4RM. This data would be passed to the data storage section 2M via the host bus 2HB. The host processor 7H having to arbitrate (bus arbitration logic 4A) to access the memory. To isolate the non accessing processor from data being either stored or retrieved from internal memory by the accessing processor, bi-directional tri-state buffer 4B are employed. This latter arrangement allows both the host processor 7H and the digital signal processing stage 2S to operate in parallel and both gain access to the data storage section 2M.

In another embodiment, the apparatus 2 has slots, such as PC TYPE 1 / 2 / 3 slots or "memory stick" slots to allow the user to insert removable memory cards 4RM into the apparatus 2. These removable memory cards contain previously stored "music data" which can then be read, processed and played by the apparatus 2. Or new "music data" can be stored onto the removable memory card 4RM so it can be used in other apparatus.

Once the user has selected the "music data " source the pre-amplifier apparatus 2 needs to process the "music data" and output the data streams to a power amplifier 1P or wireless headset 1H. The processing required depends on the format of the source data and the settings of the tone controls. Data from a magnetic cartridge will first need to be equalised and filtered. Likewise, digital data streams from a compact disc transport 1C will need digital filtering before being output to a power amplifier 1P. Compressed audio data, such as MP3, MPEG layer 2 and MPEG 4 audio data will need to

be decoded and processed. Likewise, any noise reduction schemes, such as DOLBY or tonal changes, volume and balance setting will need to be calculated and applied to the source data before being output from the pre-amplifier apparatus 2. Providing standard logic circuitry to process the various formats would be expensive and unwieldy. Employing programmable logic, such as FPGAs and digital signal processors would allow the same hardware to be re-configured to implement and process the selected data format and protocols. This is also true for the input and or output interfaces. Another advantage of employing programmable devices means that upgrades are easily implemented and the apparatus can be configured to use new data formats or interfaces. This concept of "Software Definable Systems" means the pre-amplifier apparatus is more "future proof" and shouldn't become obsolete as quickly.

Figure 5 shows a block diagram of the output stage section 2O. This section formats the processed data from the digital signal processing stage 2S for transmission to the selected device. Many of the components in the output stage 2O will need to be initialised and configured to implement the desired interface protocol. These components, such as the wireless link module 6W, the digital output interfaces 6D, are configured by the host processor 7H via the host bus 2HB. Processed digital audio data from the digital signal processing stage 2S can be output in analogue format, digital format or transmitted in a wireless format. The digital output interfaces 6D receive digital data from the digital signal processing stage 2S and format the received data into an appropriate format for transmission to the selected equipment. Depending on the interface and protocol, the format of the digital means that several digital channels can be multiplexed on the one channel. Alternatively, a digital output interface 6D can be provided for each channel.

Many legacy power amplifiers 1P will have analogue inputs. Therefore, signals output from the pre-amplifier apparatus 2 will need to be converted into an analogue form. Consequently, digital signals output from the digital signal processing stage 2S are input to digital to analogue converters 6G, such as an Analog Device AD1857.

The output of each digital to analogue converter 6G is then low pass filtered to "smooth" the signal and then amplified, buffered and impedance matched using circuitry 6F. The digital to analogue converter 6G and the filter and amplifier circuitry 6F can be combined to form an analogue output module 6AO. There will be one analogue output module 6AO per audio channel.

In some applications, the communication between the pre-amplifier apparatus 2 and other equipment, such as a headset 1H or power amplifier 1P, will be by wireless means. This allows such equipment to be positioned in a remote location. It also means equipment in other locations in a home can utilise the facilities provided by the pre-amplifier apparatus 2 negating the need for more than one pre-amplifier apparatus 2.

Accordingly, digital data output from the digital signal processing stage 2S is input to the wireless link module 6W where it is processed and formatted for transmission to the selected equipment. The wireless protocols used can be Bluetooth or HomeRF for example, but are not limited to these wireless protocols. As wireless protocols, such as Bluetooth and HomeRF can multiplex many data channels-(up to eight for Bluetooth) then the functionality provided by the wireless module 6W could be provided by the other wireless module named in the apparatus. Therefore, wireless blocks 3WM, 7W and 6W are effectively the same wireless module and are shown as different functional blocks in the corresponding diagrams to assist in the explanation of the function of the individual sub-blocks.

In another embodiment, the software and or firmware definable logic blocks can be implemented on daughter cards or mezzanine cards, which can be inserted into the main motherboard. This allows the user to easily expand the pre-amplifier capabilities. For example, the user might have purchased the basic pre-amplifier apparatus 2 initially for use in a hi-fi system, but would now like to use it in a home theatre configuration to implement a surround sound system. By adding extra functions to the main motherboard the pre-amplifier apparatus 2 can be expanded to cater for this new configuration. Other daughter cards or mezzanine cards could include input interface cards and output interface cards allowing more output channels (for example in a so called 5.1 system) to be accommodated.

In yet a further embodiment, the software and or firmware definable logic blocks can be implemented in removable cards, such as a PC TYPE 1 / 2 / 3 card. These cards can have programmable functions or fixed functions, such as a modem or Digital Audio Broadcast (DAB) receiver. In the latter function, some of the processing of the received data can be performed by the programmable logic in the pre-amplifier. Hence reducing the complexity of the circuitry on the removable card. This will also reduce the cost of implementing the function.

Figure 4 shows a logical block diagram of the digital signal processing stage 2S. The digital signal processing stage 2S comprises one or more digital signal processors 5D. Associated with each digital signal processor 5D is the program memory 5M used to store signal processing programs, local memory 5L used to store parameters used in algorithm / protocol calculations and programmable logic 5P which can be configured in real time or non-real time to implement various hardware functions required to for signal processing algorithms. To allow new software and configuration data, for the programmable logic 5P, to be updated the host processor 7H can gain access to the local memory 5L, the program memory 5M and the programmable logic 5P. To achieve this the host processor 7H must use the bus arbitration logic 5A. The host processor 7H will issue a bus request to the bus arbitration logic 5A. If access is allowed a bus grant signal will be sent

back to the host processor 7H. Data is passed to the digital signal processing stage 2S using the host bus 2HB.

The digital signal processing stage 2S accepts data from both the input stage 2I and the data storage section 2M. Data from the data storage section 2M is transferred on bus 2DB. Data from the input stage 2I is transferred on bus 2IB. These two buses are connected to a demultiplexer 5S whose output is connected to an input fifo buffer 5G. The use of a fifo buffer 5G allows data read and write to and from the buffer 5G to be performed in bursts and at different clock rates. This arrangement improves system operation and partitioning by allowing the different sub-blocks to operate at their own rates and reduces complex sub-block communication. Processed data can be transferred to the output stage 2O directly via the demultiplexer 5T or indirectly via the bi-directional FIFO buffer 5F then through the demultiplexer output stage 2O directly via the demultiplexer 5T or indirectly via the bi-directional FIFO buffer 5F then through the demultiplexer 5T. The use of the FIFO 5F allows the separate sub-blocks to operate at their own rates and also allows intercommunication between the digital signal processors 5D.

Though figure 1 shows a generic block diagram of the pre-amplifier apparatus other sub-module interconnection methods can be employed.

In one preferred embodiment (not shown), data and control transfer from data sources to data processing and data sinks between the various sub-blocks and card modules is by data packets. These card intercommunications are all digital using serial or differential serial communications links so as to reduce the number of signals and reduce signal noise between the sub-blocks and card modules. Therefore, any analogue signals are first converted to corresponding digital signals using appropriate digital to analogue signal conversion means. The selection of such conversion means ensuring the correct sampling and quantization requirements to represent the digital form of the signal with minimal quantization and noise errors. The data packets preferably being of the same length as used in the Asynchronous Transfer Mode (ATM) protocol or can be varying length packets.

The switching means can take the form of a pure cross bar switch in which signal paths between the switch inputs and switch outputs are dynamically set by the host processor 7H depending on the configuration of the apparatus 2. The switching means can also be a self routing buffered switch fabric in which data packets are transferred from the switch's input ports to the switch's output ports based on routing information contained in the header section of the data packet. As several inputs could route data packets to the same switch output port, buffering is required. To reduce congestion different priority queues could be used in the switch to allow higher priority traffic preference over lower priority traffic. This allows real time traffic and traffic requiring a better class of service to pass through the switch fabric with a lower latency and hence reduce timing errors. The switch paths and header



fields are set by the host processor at system start-up or if there is a new configuration update.

The advantages of using a switch to route data packets between different sub-blocks, card modules and devices are that it reduces the complexity of the interconnection. Each card slot does not require connections to all other possible card slot locations. Control and data messages can be switched to the correct sub-block, card module and or device via the switching means. This makes it easier to configure the system and allows the card modules to be placed almost anywhere in the apparatus card slots as the host processor 7H card can interrogate each cards to determine it's function and initialise it and the system accordingly. Also, certain card modules can incorporate Plug'n'Play means, which allows card modules to initialise and or assist in configuring themselves. Another preferable feature is for the card modules to be 'hot swappable'. This feature allows cards to be removed or inserted into the apparatus 2 while the system is operational.

In a preferred embodiment, communication between the signal source peripheral devices (1C, 1D, 1M, 1N, 1R, 1S, 1T) and the pre-amplifier apparatus 2 can be by wireless means such as Bluetooth or HomeRF.

Likewise, the output from the pre-amplifier apparatus to signal sink or destination apparatus, such as a mobile headset 1H or a power amplifier 1P can be by a wireless protocol. Figure 7 outlines this system arrangement. The advantage of this is that it removes the need for cumbersome cabling, the equipment is configured automatically using a service directory protocol such as that employed in Bluetooth and a single pre-amplifier apparatus 2 can be used by many remote application situated around the user's home negating the need for many pre-amplifiers for each separate piece of audio equipment.

In yet another embodiment, the apparatus 2 uses microphones 1F to monitor the produced sound output from the apparatus via a power amplifier 1P. These feedback signals can be used by appropriate signal processing algorithms (implemented in the software definable logic) to adjust the parameters to adapt the output signals to the desired signals.

The apparatus 2 can also implement signal-processing algorithms to implement reverberation and echo effects. Another signal processing or signal conditioning algorithm will allow the pre-amplifier apparatus 2 to emulate the "sound" of other amplifier. For example, many hi-fi enthusiasts prefer the sound of a valve amplifier. Signal processing algorithms can be used to emulate this particular "valve sound" and so allows the apparatus 2 to sound like a valve amplifier.

Although the invention has been described herein with reference to particular preferred embodiments, it is to be understood that these embodiments are illustrative of the aspects of the invention. As such, a person skilled in the art

may make numerous modifications to the illustrative embodiments described herein. Such modifications and other arrangements which may be devised to implement the invention should not be deemed as departing from the spirit and scope of the invention as described and claimed herein.

## CLAIMS

1. Modular and software definable pre-amplifier apparatus (used to perform audio signal conditioning before being output to power amplification and or headset means) comprising:

(a) one or a plurality of software definable logic blocks, these logic blocks being based on Programmable Logic Devices (PLDs), such as Field Programmable Gate Arrays (FPGAs), which can be configured in real time and or non real time to implement in hardware different signal processing functions required for different digital signal processing algorithms and or audio processing protocols, such as Dolby noise reduction, AC3, MPEG2, MP3, MPEG4, Home Theatre, various types of digital filters, thus allowing the apparatus to be used in different audio system configurations, the programmable logic optionally providing hardware acceleration of complex and software intensive functions, the configuration of the software definable logic blocks being performed by either firmware stored in local memory associated with the programmable logic devices and or by the host processor transferring the configuration data to the programmable logic devices directly or indirectly to local memory associated with the programmable logic devices or via a JTAG port of the programmable logic device, the choice of configuration firmware program depending on the user selected parameters, these parameters being entered into the apparatus via either an integrated keypad and front panel controls and or via remote control means, or personal computer means, the input information being displayed on display means, such as an Liquid Crystal Display (LCD), the software definable logic blocks optionally incorporating digital signal processor (DSP) devices and associated memory devices, the configuration and allocation of the software programs used by each digital signal processor device being performed in real time and or non real time by the host processor or configuration routines stored in non-volatile memory associated with the digital signal processors, the allocation of the specific software program being determined by user inputs;

(b) mezzanine and or card modules which allows the apparatus to be expanded or upgraded for use with other protocols or for adding more audio output channels and or accommodating more source channel interfaces, is accomplished by interfacing mezzanine or card modules to the apparatus, these mezzanine and or card modules containing any combination of the following circuitry;

- 1). Digital Signal Processor,
- 2). Memory,
- 3). Programmable Logic Devices (PLDs),

- 4). Interface logic,
- 5). Analogue to Digital Converter (ADC),
- 6). Digital to Analogue Converter (DAC),
- 7). Small signal amplification and or filter circuitry;

(c) integrated memory means, such as a hard disc drive and or non-volatile semiconductor memory and or volatile semiconductor memory for storing and retrieving digitised audio data signals;

(d) a host processor and associated program memory means for controlling, monitoring and configuring the apparatus;

(e) modem means, allowing Internet access so the user to download upgrade firmware or software for implementing new audio protocols and or configuring the programmable logic hardware and or signal processing algorithms allowing the logic and processing elements in the apparatus to be reconfigured to implement the new algorithms and or hardware configurations, the new firmware and software being stored in non-volatile memory, the Internet access also allows the user to download audio information, such as MP3 data, which can then be processed and optionally stored by the apparatus before being output to other apparatus, such as a power amplifier and or headset.

2. Apparatus as claimed in any preceding claim which has the facilities to allow removable memory means, such as a PC TYPE 1 / 2 / 3 card or memory stick to be inserted into the apparatus and removed from the apparatus, previously stored data being read from the removable memory means and processed by the apparatus before being output, alternatively processed music data and or digitised audio signals, formatted in the selected format, can be stored in non-volatile memory in the removable memory card allowing the user to play the recorded data on another apparatus which has the facilities to access the data stored on the removable memory card means.

3. Apparatus as claimed in any preceding claim in which the input circuitry and or output circuitry is based on programmable logic devices, such as Field Programmable Gate Arrays (FPGAs), allowing the interfaces to be re-configured to implement the desired interface protocol or format.

4. Apparatus as claimed in any preceding claim which uses feedback signals from remote microphone means to allow the signal processing means to adapt in real time the sound of the played music to the desired acoustical settings.

5. Apparatus as claimed in any preceding claim which incorporates Analogue to Digital converter (ADC) means to allow analogue input signals to be first converted to digital signals so they can be processed in the digital domain,

the sampling frequency of the Analogue to Digital Converter(s) (ADCs) being sufficient to accurately represent the signal in the digital domain.

6. Apparatus as claimed in any preceding claim in which the input signal to the apparatus from source means and or the output signals from the apparatus to signal sink means is by wireless communication means.
7. Apparatus as claimed in claim 6 in which the wireless protocol used to transfer data to and from the pre-amplifier apparatus is Bluetooth, HomeRF, IEEE 802.11 or Wireless ATM.
8. Apparatus as claimed any preceding claim wherein the mezzanine card and or card module interface means are based on programmable logic, for example Field Programmable Logic Arrays (FPGAs) so upgrades can be easily implemented by changing the interface devices of the associated card module and or mezzanine card.
9. Apparatus as claimed in any preceding claim in which the signal processing blocks are programmed and or configured to implement reverberation and echo effects.
10. Apparatus as claimed in any preceding claim in which the signal processing blocks are programmed and or configured to emulate the acoustic characteristics of a value amplifier and alter the output signals so they sound as if they were produced by a value amplifier.
11. Apparatus as claimed in any preceding claim in which upgrade and new programmable logic device configuration programs and or algorithms can be downloaded from the Internet via integrated modem means, these new software upgrades being stored internally by the internal host processor and controller circuitry.
12. Apparatus as claimed in any preceding claim in which a personal computer (PC) can be connected to allow control of the apparatus, reconfigure the apparatus, diagnose the apparatus and or download or upload music data, which can be processed or stored in internal memory form future use.
13. Apparatus as claimed in any preceding claim in which the remote control means can be used to control the peripheral signal source apparatus, such as a compact disc player via the pre-amplifier apparatus.
14. Apparatus as claimed in any preceding claim in which digital switching means are employed to route and transfer data from different sub-blocks, card modules and or devices in the apparatus.
15. Apparatus as claimed in claim 14 in which the digital switching means takes the form of a cross bar switch or a self-routing switch in which data

packets or cells have an appended routing tag to control the flow of the packet or cell through the self-routing switch to its destination.

16. Apparatus as claimed in claim 15 in which the digital switching means uses priority output queues to allow data with different priorities to be queued in separate queues to reduce congestion and head of line blocking.

17. Apparatus as claimed in any preceding claim in which digital data for transfer via switching means is encapsulated as a variable length data packet or same length cell.

18. Apparatus as claimed in any preceding claim which incorporates an integrated read / write able compact disc player to allow stored digitised audio data to be written to a compact disc.

19. Apparatus as claimed in any preceding claim where peripheral units are situated remotely from the pre-amplifier apparatus in which control and data messages are transferred by wireless means allowing movement of the said remote peripheral units to different locations within the user's house without the need to re-wire the apparatus.

20. Apparatus as claimed in any previous claim wherein the mezzanine cards and or card modules incorporate 'Plug and Play' means to allow a mezzanine card and or card module to configure and initialise itself and interact with the host processor means to indicate the configuration, status and functionality of the card module and associated mezzanine card modules.

21. Apparatus as claimed in any previous claim wherein the mezzanine cards and or card modules incorporate the means to be hot swappable allowing card module insertion or removal from the apparatus card frame while the apparatus is operational.

22. A modular, software definable pre-amplifier apparatus substantially as described herein with reference to Figures 1-7 of the accompanying drawings.

## ABSTRACT

### MODULAR SOFTWARE DEFINABLE PRE-AMPLIFIER

Pre-amplifier apparatus, for use for example in a home hi-fi system, comprises a plurality of software and or firmware definable logic blocks used to configure the apparatus to implement the desired audio processing functions and audio protocols for use in different audio systems. The apparatus is also modular allowing expansion through the use of mezzanine and or PC cards, which contain, amongst other things, signal processing logic and programmable logic. All signal processing is performed in the digital domain so any analogue input signals are first converted to digital signals using analogue to digital converter means. Remote audio feedback to the apparatus allows the apparatus to adapt in real time to the desired acoustic settings.

The apparatus optionally contains modem means to allow access to the Internet for downloading software upgrades and music data such as MP3.

To reduce the need for expensive and cumbersome cables, communication with peripherals can be via wireless means such as Bluetooth.

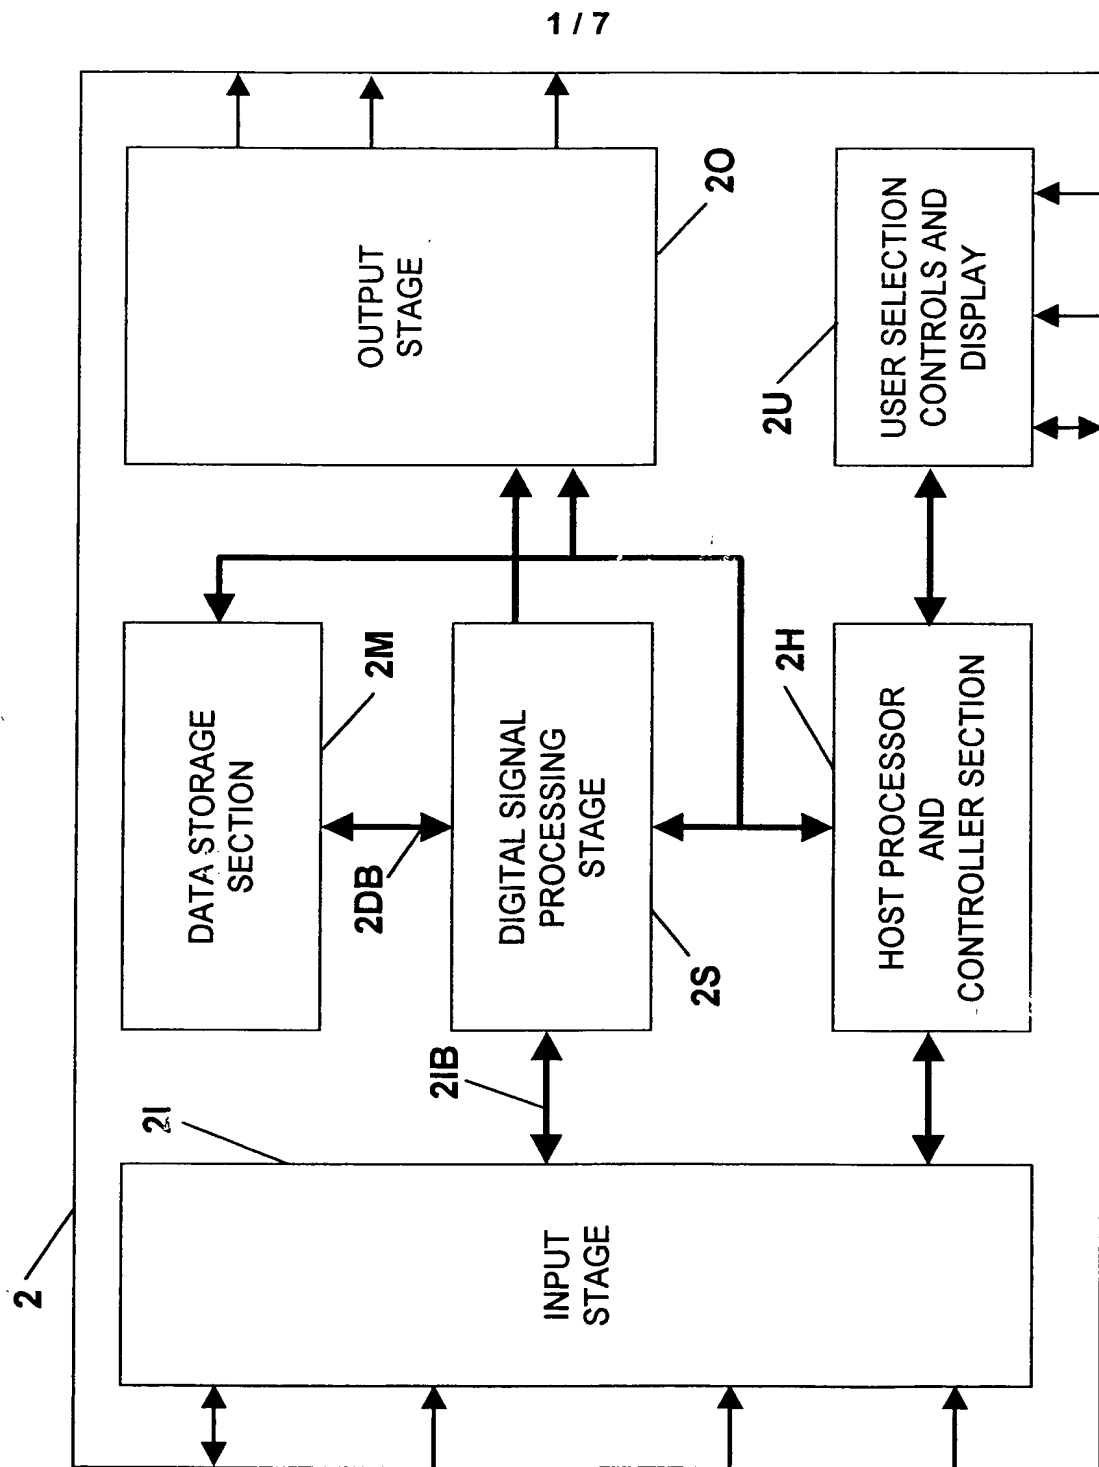


Fig 1



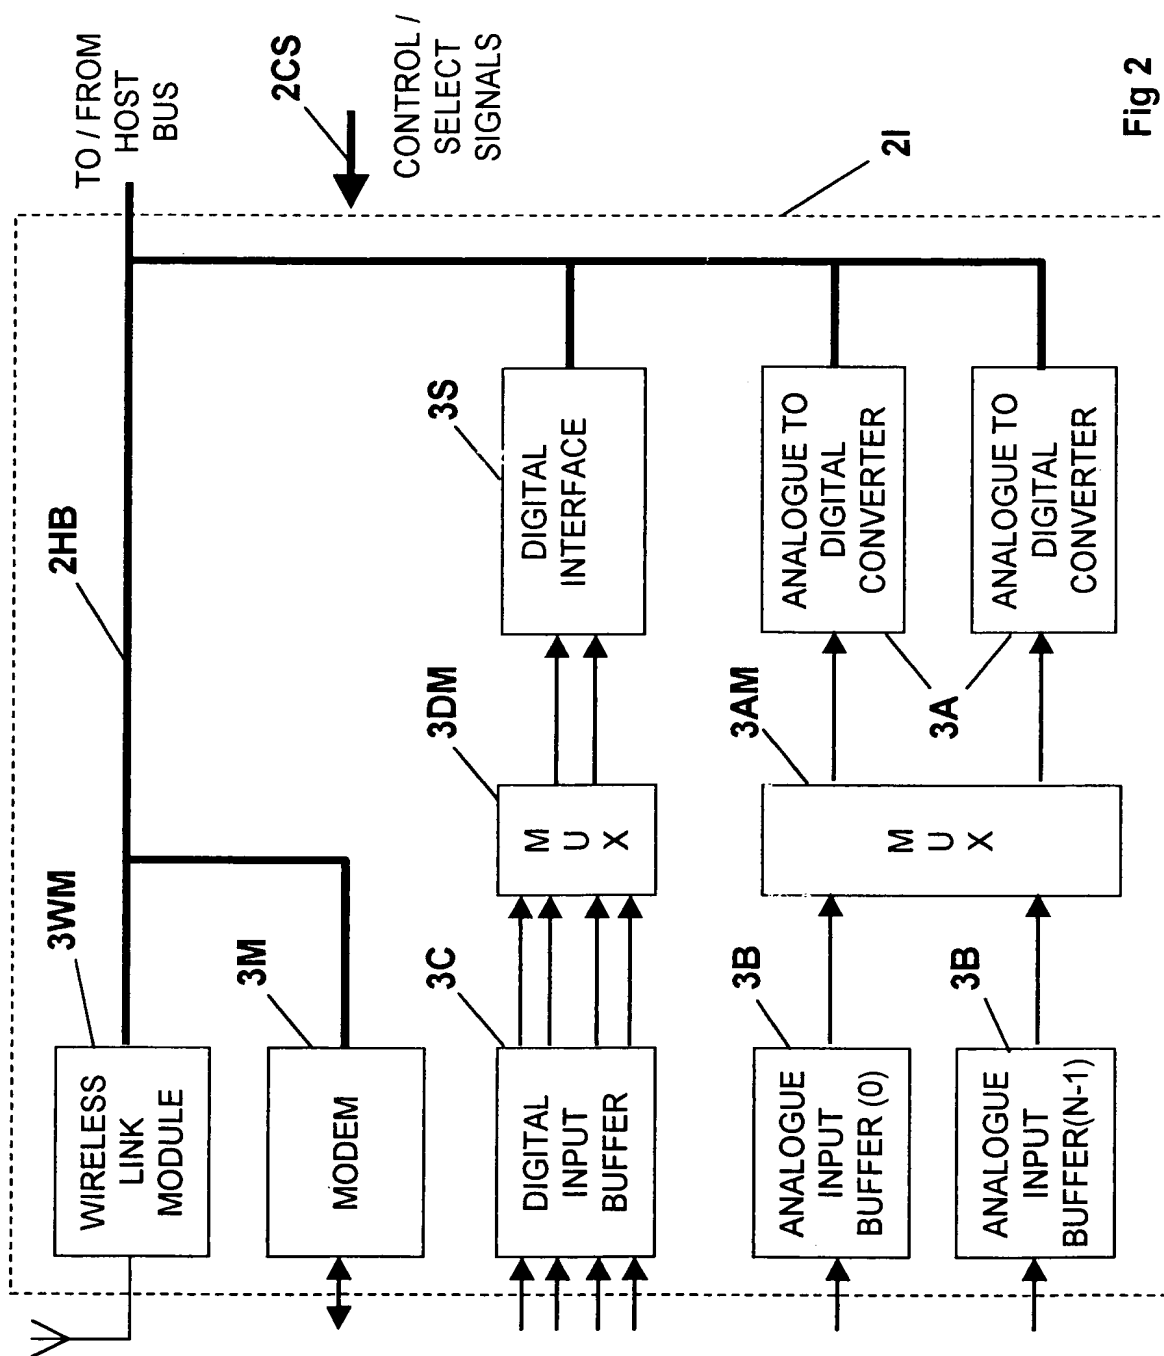


Fig 2

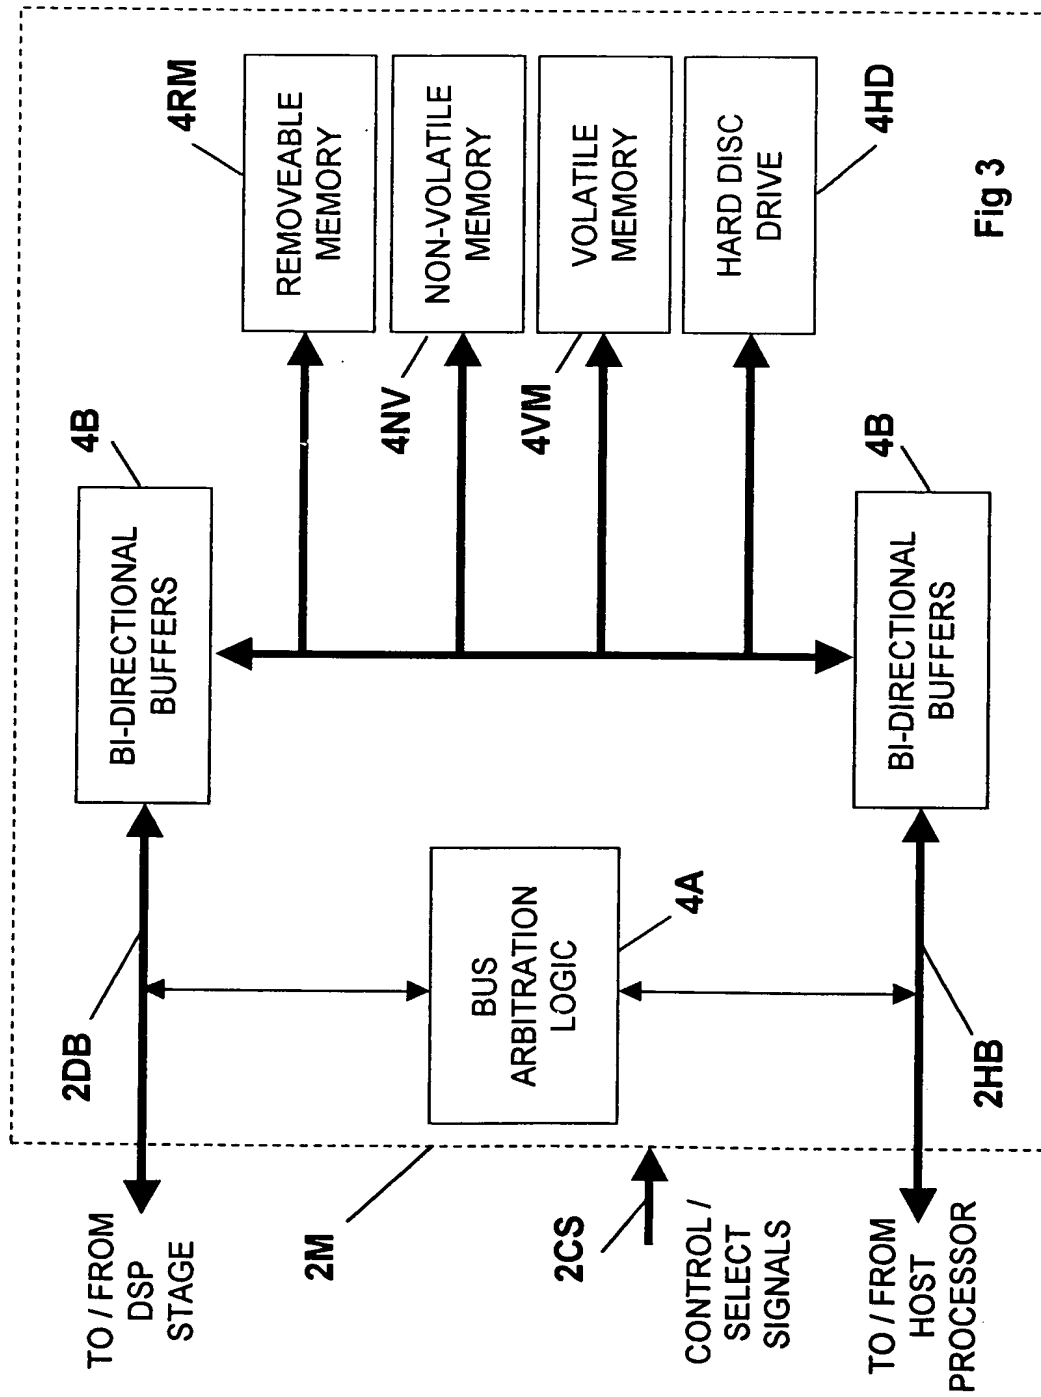
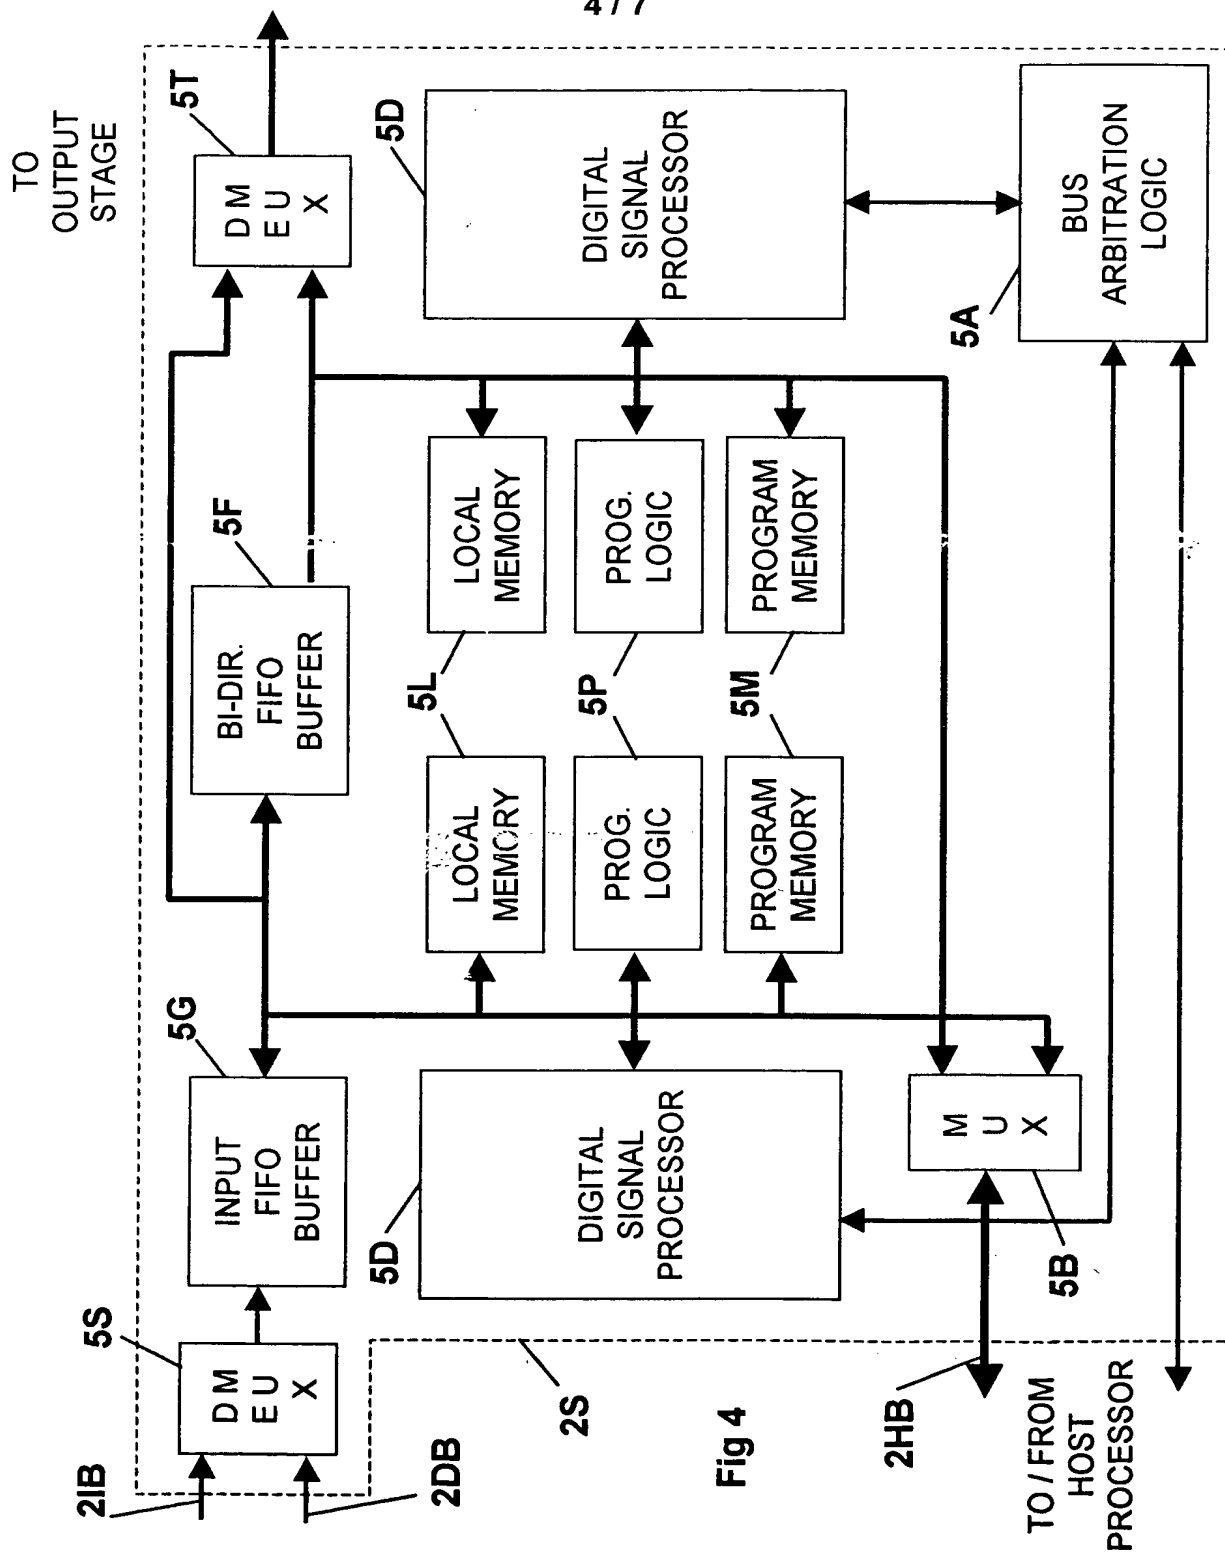


Fig 3



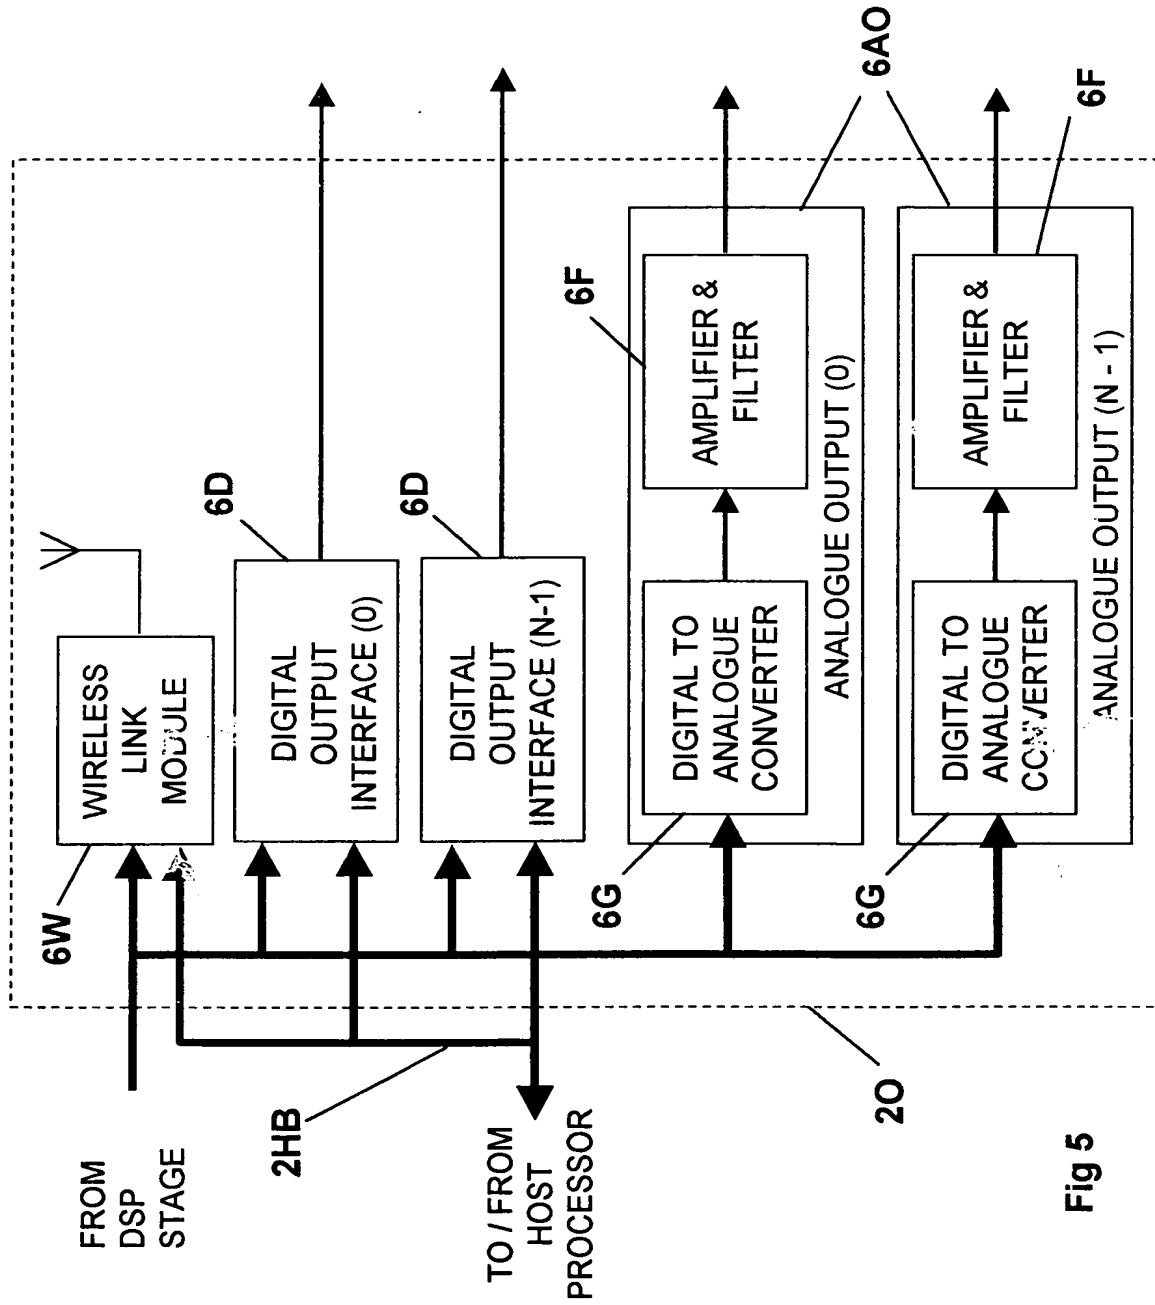
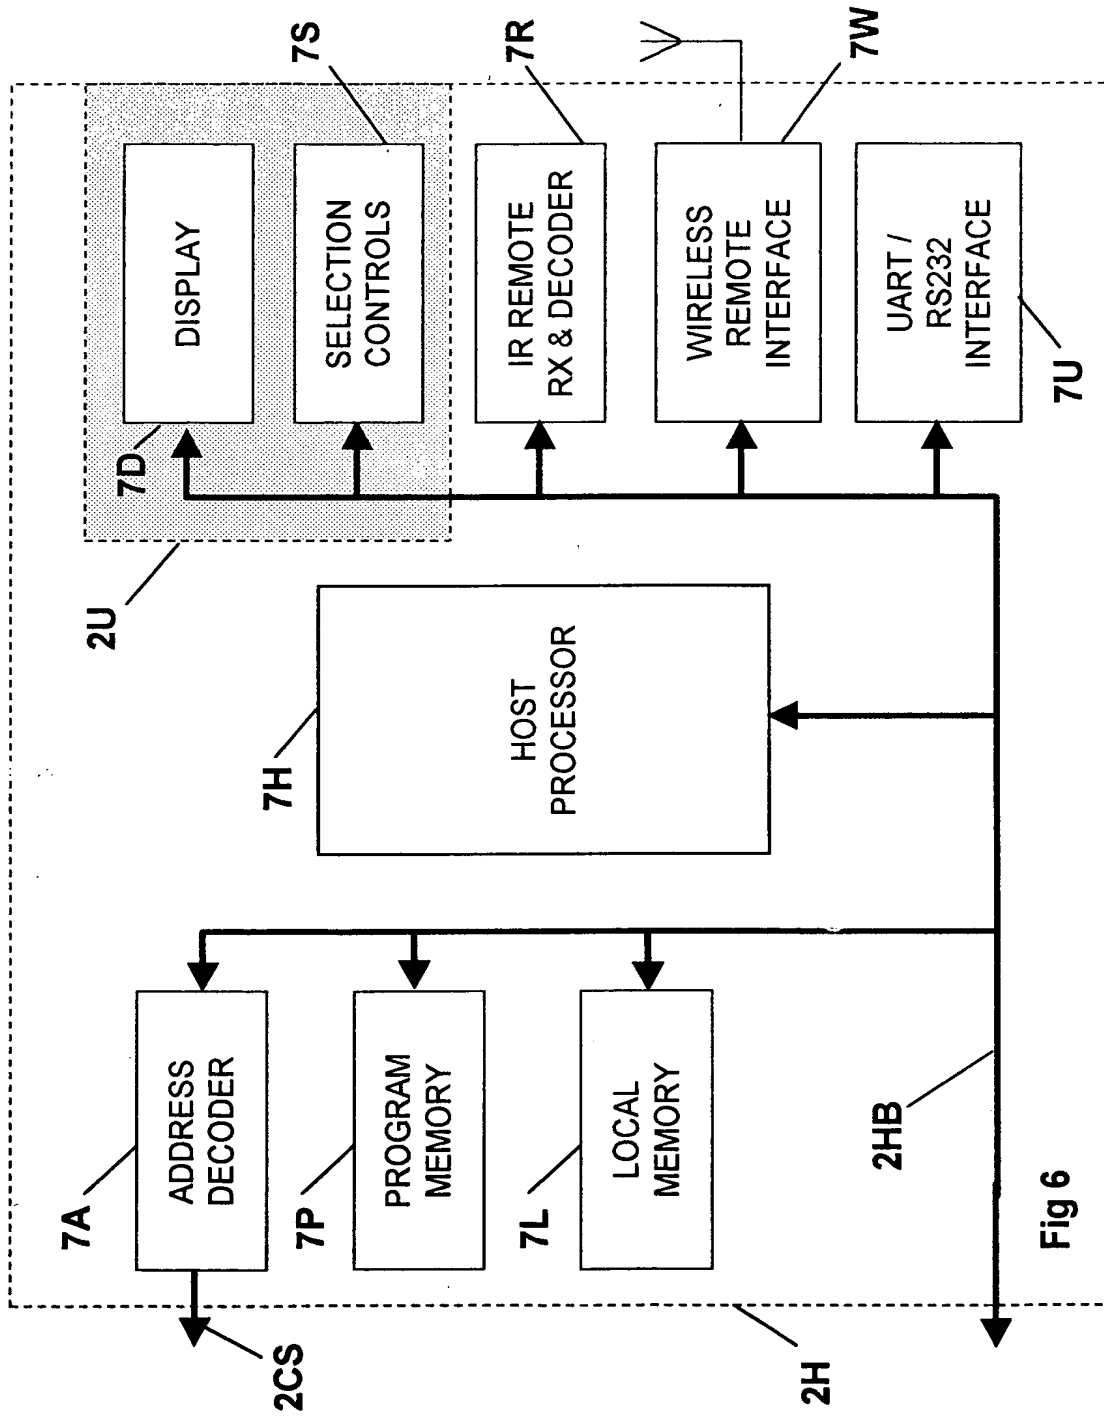


Fig 5



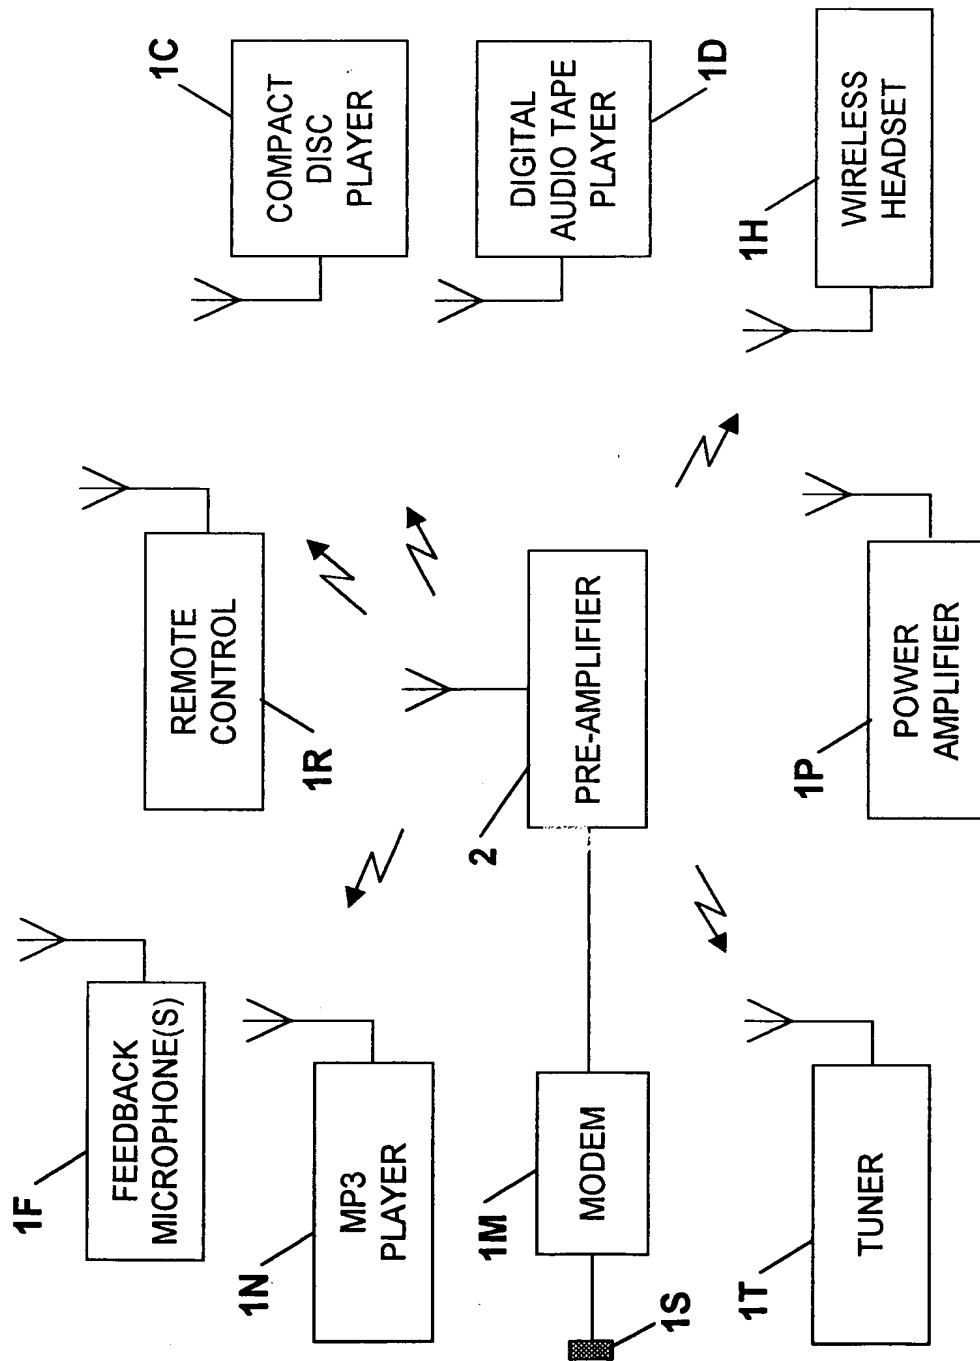


Fig 7

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**